




## Flap Diverter Valves VAB

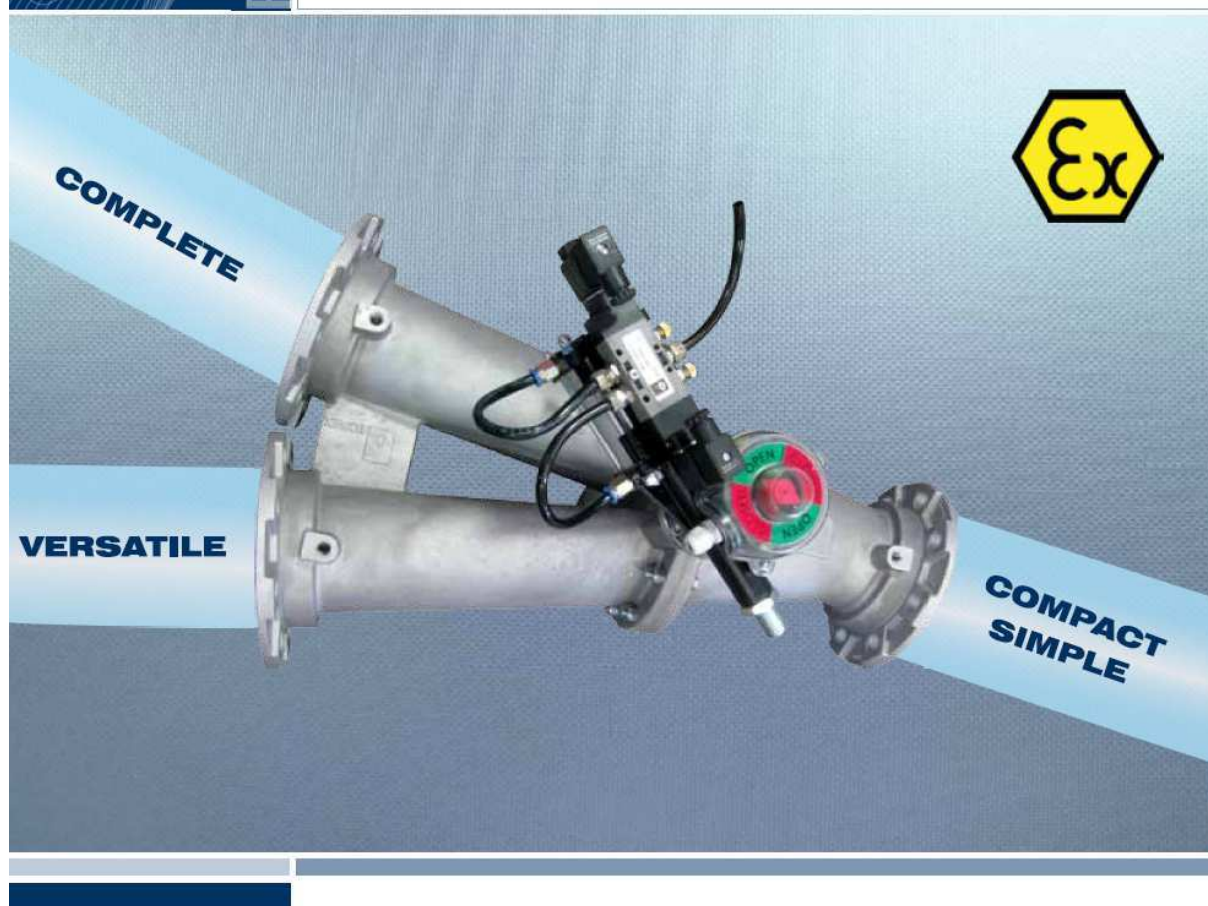

## Flap Diverter Valves VAB

# VERSATILE SOLUTION FOR PNEUMATIC CONVEYING SYSTEMS

The flap diverter valve uses a swinging flap to divert material from one duct to another. The VAB Flap Diverter Valves are fitted on pneumatic conveying ducts whenever it is required to switch the flow of material to different production lines.

### Features


#### VALVE

- Casing: cast aluminium alloy;
- Mobile flap seal: EPDM (white colour, food-grade certified, antistatic);  
Metal plate - 304 Stainless Steel
- Working temperature: from - 20°C to 80°C
- Working pressure: max.+ 2.0 bar and -0.3 bar.
- Various actuators available
- Diameter Range: 50 mm – 65 mm - 80 mm – 100 mm – 125 mm – 150 mm – 200 mm
- Cast aluminium alloy or nickel plated version both available with ATEX certification for Group II Cat. 1D/3D c T 135°C on request
- It can be used either as diverting or converging

#### ACTUATOR

- Pneumatic Actuator** (CP063 for VAB 50 to VAB 125 - CP101 (VAB 150 – VAB 200 + MIC23 for all sizes)
- Voltage supply: 24 V AC, 24 V DC, 110 V AC, 230 V AC;
- Electric Actuators** (AE4011 for VAB50 to VAB125 – AE5011 for VAB150-VAB200)
- Voltage supply: 230/400 V AC 50/60 Hz
- Manual Actuator** (CM4 for all sizes)
- Manually operated

### Overall Dimensions

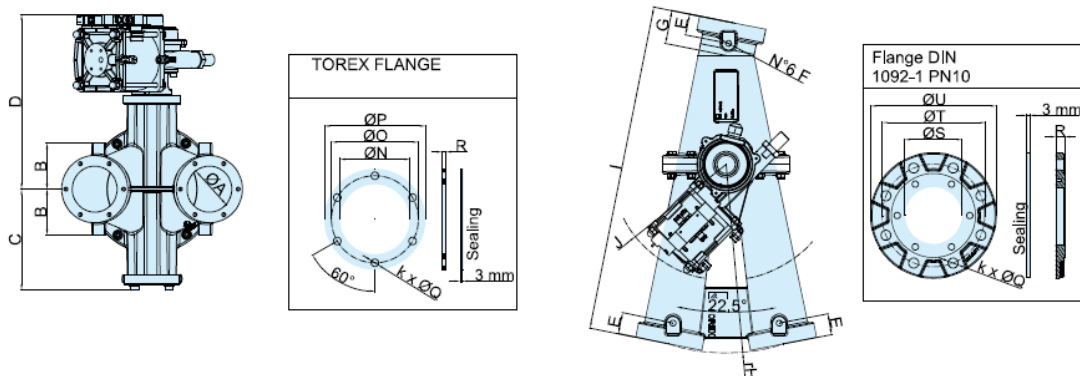

|      |     |     |     |    |     |     |     |       | Pneumatic Actuator |     | Electric Actuator |     |       |
|------|-----|-----|-----|----|-----|-----|-----|-------|--------------------|-----|-------------------|-----|-------|
| Size | A   | B   | C   | E  | F   | G   | r H | I     | D                  | r J | D                 | r J |       |
| 50   | 50  | 60  | 153 | 32 | 70  | 45  | 448 | 493   | 281                | 205 | 363               | 275 |       |
| 65   | 65  | 70  |     | 37 |     | 47  | 497 | 545   |                    |     | 305,5             |     | 387,5 |
| 80   | 80  | 80  |     |    |     | 59  | 514 | 574   |                    |     |                   |     |       |
| 100  | 100 | 90  | 178 |    |     | 559 | 629 | 330,5 | 412,5              |     |                   |     |       |
| 125  | 125 | 110 | 203 | 65 | M16 | 74  | 639 |       |                    |     | 712               | 495 | 290   |
| 150  | 156 | 125 | 277 |    |     | 74  | 745 |       |                    |     | 818               |     |       |
| 200  | 206 | 150 |     |    |     | 857 | 922 |       |                    |     |                   |     |       |

Dimensions in mm

## Benefits


### 1 Quick integration into the process



#### TOREX® FLANGES


Provided with:

- Carbon steel counter-flanges
  - 304 Stainless Steel counter-flanges
- TOREX® flanges can be welded to the pneumatic duct  
Dimensions are the same as for VAR Diverter Valves



#### DIN FLANGE 1092-1 PN 10

- Cast aluminium alloy available
- The dimensions of these flanges are the same as for VM Pinch Valves

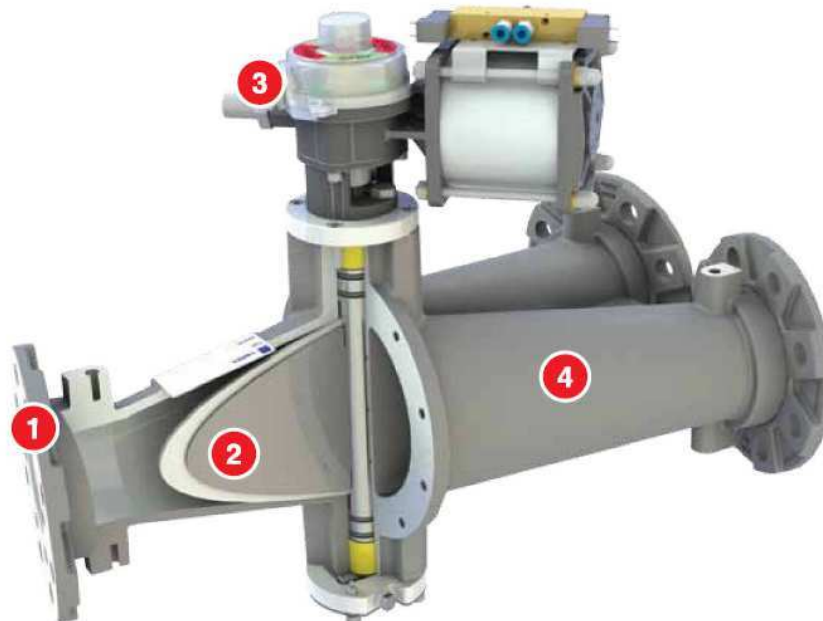

### 2 Switching Flap



Easy to use as Diverter or Converter

- Narrow diverting angle of 22.5°
- Low pressure drop due to minimum transition effect
- Smooth internal surface (no lodgement points)
- Modular design and easy maintenance thanks to small numbers of components
- Lightweight and compact overall dimensions

### 3 Various type of actuators



Pneumatic Actuator CP063/CP101  
Working Pressure: 2-7 bar



Electric Actuator AE40A11  
Power: 0,18 kW  
Protection: IP 55,  
Voltage: 50 Hz - 230/400 Volt



Manual Actuator CM4

### 4 Nickel Plated Version



- No contamination thanks to food-grade certified Nickel plating
- Corrosion resistant
- Higher surface hardness

## Application

