



ETUDE DISTRIBUTION POUR LES POUDRES ET GRANULEUX

SILOTOP® zero

Silo Venting Filters



**HIGH PERFORMANCE
FEW COMPONENTS**




CUTTING-EDGE DUST FILTRATION TECHNOLOGY

SILOTOP® zero is a cylindrically shaped dust collector for venting pneumatically filled silos. Its stainless steel body contains vertically mounted POLYPLEAT® filter elements. The air jet cleaning system is integrated into the hinged weather protection cover.

Dust separated from the air flow by special filter elements drops back into the silo after an integrated automatic pulse-jet air cleaning system has removed it from the filter media.

Air filtration capacity has been increased through new high performance filter media, which require less filter surface area. This results in a lower pressure drop and dust emissions of less than 1mg/Nm³.

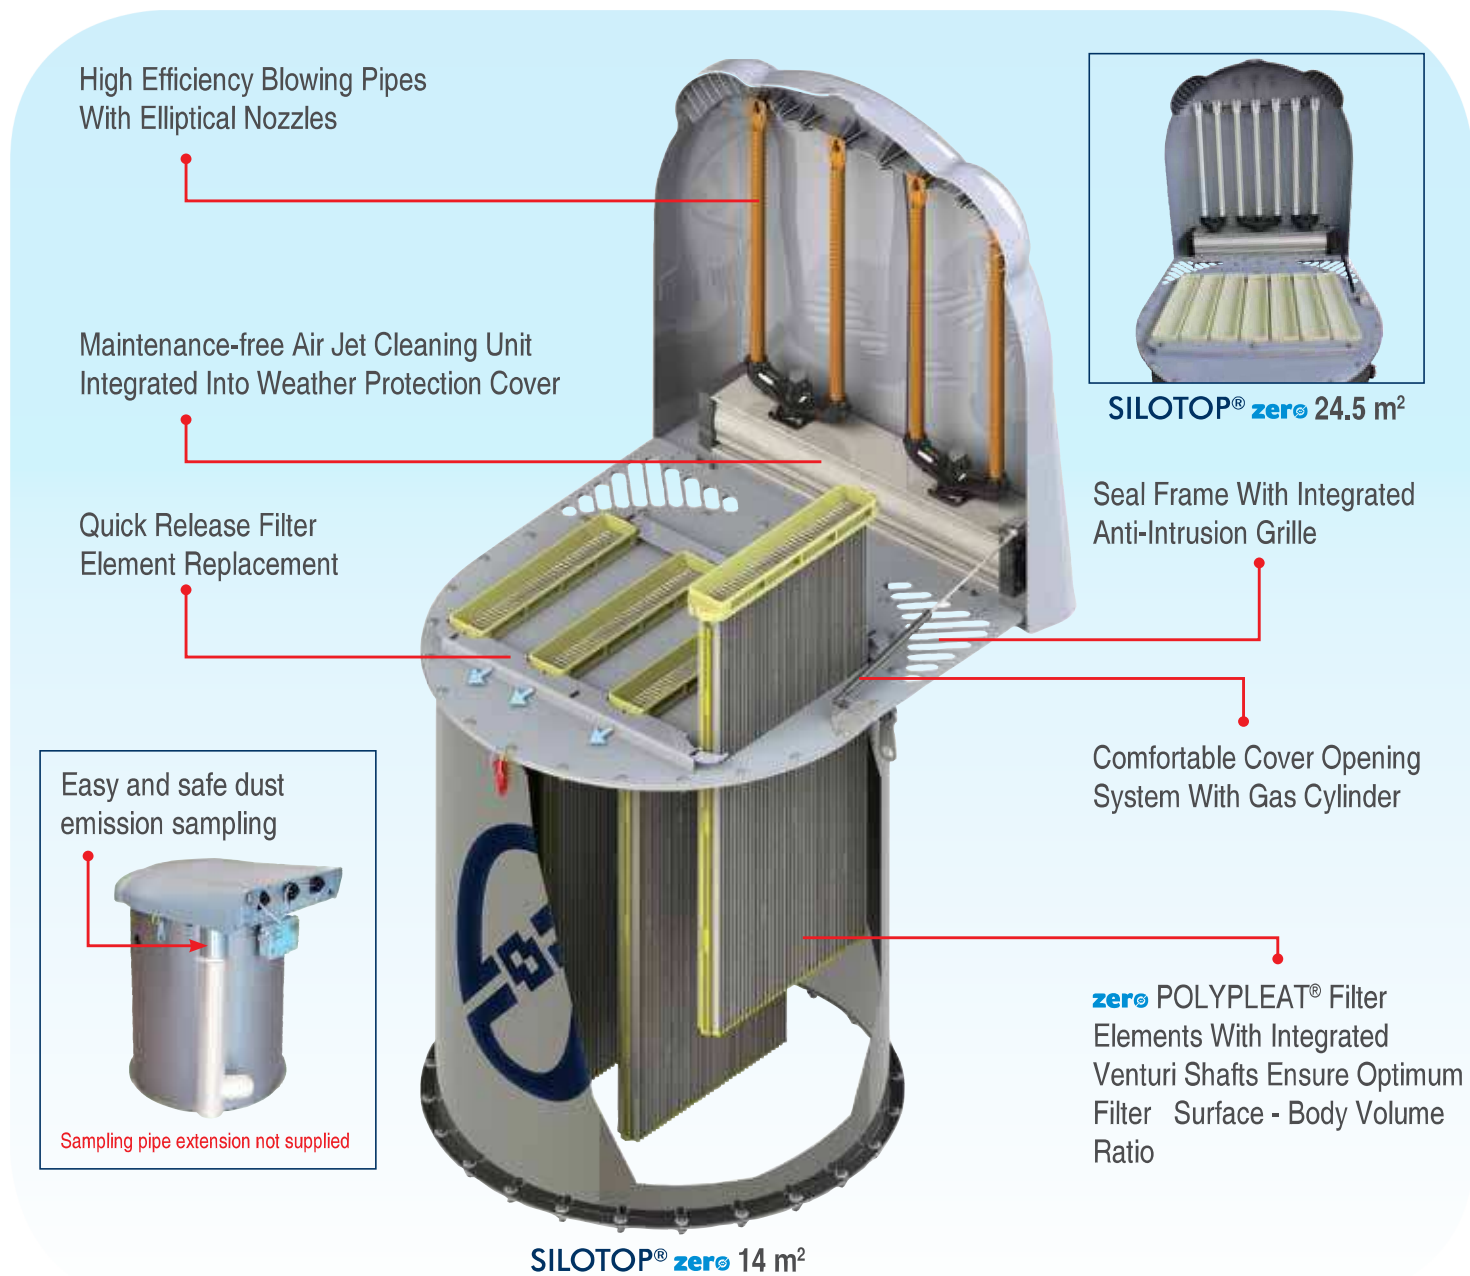

Overall Dimensions

CODE	BODY Ø mm [in]	FILTER SURFACE m² [sq ft]	MAX. HEIGHT WHEN CLOSED mm [in]	MAX. HEIGHT WHEN OPEN mm [in]	WEIGHT kg [lb]
SILAB 14	800 [31.5]	14.0 [150]	1,100 [43.3]	1,850 [72.8]	68 [150]
SILAB 24	800 [31.5]	24.5 [264]	1,100 [43.3]	1,850 [72.8]	79 [174]

Features

- Dust emission $< 1 \text{ mg/Nm}^3$ due to **filter media certified EN ISO 16890-1:2016, Group ISO ePM_{2.5}65%**
- Air flow **performance increased** by 30%
- **Compact** 800 mm (30 in) diameter stainless steel body with bottom flange
- **Maintenance-free** air jet cleaning unit integrated into weather protection cover
- Maintenance height = 1,100 mm (3.6 ft)
- **Extended durability** due to **zero** filter media POLYPLEAT® elements
- **Safe** weather protection cover with **lockable quick release**


Easy and Safe Maintenance



Benefits

- ✂ **Perfectly accessible due to compact design**
- 🔧 **Rugged construction**
- 👤 **Lightweight POLYPLEAT® filter elements easily replaceable by one operator only**
- 🌿 **Eco-friendly **zero** filter media**

Economic Savings Using **zero** Filter Media

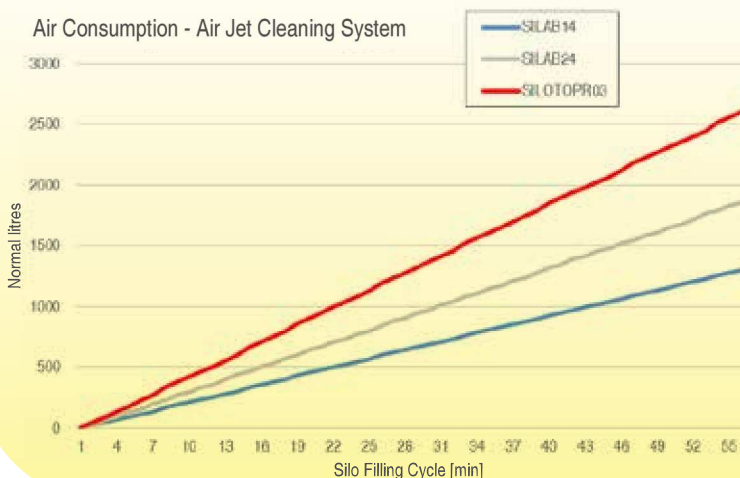

- 🔧 **Up to 50% lower annual management costs due to lower air consumption**
- 🔄 **Up to 30% savings in spare parts**
- 🕒 **Up to 20% savings in silo filling time (in standard test conditions)**

Accessories

- Weld-on bottom ring
- Multifunctional electronic differential pressure meter
- Winter protection for solenoid valves
- Emission sampling kit

Application



203001236 February 2017 Rights reserved to modify technical specifications.



ETUDE DISTRIBUTION POUR LES POUDRES ET GRANULEUX



www.wamgroup.com